


PRK58518 WAX/RESIN

PRK58518 is a near edge premium wax/resin ribbon, designed to provide a high resolution image on a wide variety of label stocks. It has excellent resistance to smudging and scratching and is ideal for in-line coding printers

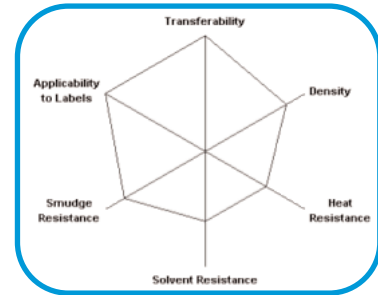

TECHNICAL SPECIFICATIONS

Ribbon Properties

Ink Type	Wax/Resin
Ribbon Thickness	10.0µm
Base Film Material	Polyester
Base Film Thickness	4.5µm
Ink Colour	Black
Transmission Density	More than 1.3 (Macbeth)
Recording Energy	15mJ/mm₂

Printing Properties

Image Density	More than 1.6 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Coated Paper, Gloss Paper, Synthetic
Paper,	PET.
Print Speed	Up to 8 inch/sec
Usage Conditions	5°C to 35°C, 10% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 10% to 90% Relative Humidity

Key Characteristics

- Extremely durable ribbon with excellent levels of scratch and smudge resistance
- Excellent print quality at high speeds
- Ideal for in-line coding printers and also desktop printers
- Crisp dark image
- Minimum order one run
- Competitively priced
- Silicon back coated which protects and prolongs the life of the printhead

Recommended substrates

PE, PET, Poly bags, polyester, paper, coated paper and card, uncoated paper, tags and tickets, glossy labels

Applications

General, Shipping, Inventory, Logistics, Product ID, Shelving, Pharmacy, Retail, Horticulture, Number plates, Healthcare, Asset tracking

BEST STORAGE CONDITION

Keep out of direct sunlight Temperature -5°C - 40°C
Humidity 20%-85%RH
12 months from date of manufacture

This ribbon is manufactured in accordance with ISO 9001:2000 European Quality Standard

We guarantee that the mentioned products are in compliance with the following EC directive.

1. EN 2002/95/EC: Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)
2. EN 2002/96/EC: Directive on waste electrical and electronic equipment (WEEE)

TYPE
RITE 08
LIMITED